



Lighting Catalog														
RECESSED			SURFACE			PENDANT			WALL		PROFILES		OUTDOOR	
TROMPET	6		ARK	70		LELO PENDANT	108		WAFER BOX	128	LENTA	138	FILI	168
CAST LED	8		CAST SURFACE	74		KAMBANA	116		WAFER	130	STRIP	142	FAR	170
CAST POINT	14		CAST LED SURFACE	76		SHU	118		FILI	132	STRIP INCASSO	147	FAR 150	172
CAST	20		CAST SQ LED SURFACE	79		TUBA	122		FLEXI	133	STRIP MINI	150	POLE	174
CAST 110	24		CUBE	80							STRIP MINI SLIM	160	BUTALO	180
CAST TRIMLESS SQ	29		POINTER 60 BASE	82									MARK A	184
BLED	30		POINTER 60 TRACK	84									WALLY	186
KVADRA	32		POINTER 48V TRACK	90									NIZ WALL	188
CYL	37		LUPO BOX	96										
LUPO	38		SITTO BOX	98										
SITTO	42		SITTO EXTERNAL	100										
SITTO LED	50		LELO SURFACE	102										
SHAIBA	54												POWER FEED	190
SHAIBA QR	58												CODES	191
DOTS	62												CUSTOM	192
POINTER 30 RECESS	64												ABOUT	198
POINTER 60 RECESS	66													

2

3

RECESSED

TROMPET

Small round recessed downlight with deeply recessed position for minimal visual impact. Versions available with trimmed and trimless options. A separate plaster kit is supplied for the trimless version.



TROMPET

01 WHITE

02 BLACK



	reference	2085HW/WW/W
	cut-out mm	Ø 34
	led wattage	7 W
	power supply	max 200 mA DC
80	lamp	COB 2700, 3000, 4000 K / CRI 97+
IP20	optics	44°



TROMPET TRIMLESS

01 WHITE

02 BLACK



	reference	2086HW/WW/W
	cut-out mm	Ø 55
	led wattage	7 W
98	power supply	max 200 mA DC
IP20	lamp	COB 2700, 3000, 4000 K / CRI 97+

TRIMLESS FRAME

reference	50044
-----------	-------

CAST LED

A range of round recessed or semi-recessed downlights with deeply recessed LED position for minimal visual impact. Versions available with trimmed and trimless options. A separate plaster kit is supplied for the trimless version.



CAST LED


01 WHITE

02 BLACK

05 ALU

.12 GOLD



reference	2009HW/WW/W
	Dim-to-Warm available
cut-out mm	Ø 82
led wattage	12.9 W
 power supply	350 mA DC
 lamp	COB 2700, 3000, 4000 K / CRI 97+
 optics	32°



WTC Schiphol (Fortune bar), Studio Rublek



CAST LED TRIMLESS




reference	2019HW/WW/W
	Dim-to-Warm available
cut-out mm	Ø 98
led wattage	12.9 W
power supply	350 mA DC
lamp	COB 2700, 3000, 4000 K /CRI 97+
optics	32°

TRIMLESS FRAME

reference	50045
cut-out mm	Ø 96

CAST LED CONCRETE PACK

For fair faced concrete	
reference	50049

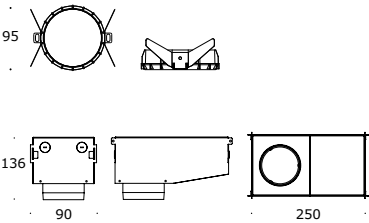


Eneco World Rotterdam, Studio Rublek



Private house, Theodoor Interior Concepts



CAST LED SEMISURFACE



reference	2010HW/WW/W
	Dim-to-Warm available
cut-out mm	Ø 82
led wattage	12.9 W
power supply	350 mA DC
lamp	COB 2700, 3000, 4000 K / CRI 97+
optics	32°
240 240	
IP20	CE

CAST POINT

A round recessed adjustable spotlight with deeply recessed LED position for minimal visual impact. Versions available with trimmed and trimless options. A separate plaster kit is supplied for the trimless version.



CAST POINT

01 WH EX/ BL IN
02 BLACK
11 WH EX/ WH IN
BR BRUSHED BRASS




reference	2209HW/WW/W 2210HW/WW/W Dim-to-Warm available
cut-out mm	Ø 92
led wattage	12.9 W
power supply	350 mA DC
lamp	COB 2700, 3000, 4000 K / CRI 97+
IP20	optics 32° 16°



Private house, Pavlov architects



CAST HONEYCOMB ACCESSORY




reference

22200



CAST POINT TRIMLESS



reference	2219HW/WW/W 2220HW/WW/W Dim-to-Warm available
cut-out mm	Ø 98
led wattage	12.9 W
power supply	350 mA DC
lamp	COB 2700, 3000, 4000 K / CRI 97+
optics	32° 16°

TRIMLESS FRAME

reference	50045
cut-out mm	Ø 96



CAST

Fixed round recessed or semi-recessed downlight with small trim and deeply recessed lamp position for minimal visual impact. Available in 230V/GU10 version.



CAST GU10

01 WHITE

02 BLACK


05 ALU

.12 GOLD

85



130





115		wattage	max 50 W
IP20		lamp	 QPAR51
230V		base	GU10

reference

2004

cut-out mm

Ø 80



Eneco World Rotterdam, Studio Rublek




Eneco World Rotterdam, Studio Rublek



Office, DontDIY Studio

CAST SEMISURFACE GU10



reference	2007
cut-out mm	Ø 83
wattage	max 35 W
IP20	lamp
230V	base
	QPAR51
	GU10


CAST 110

Fixed round recessed or semi-recessed downlight with small trim and deeply recessed LED position for minimal visual impact.



CAST 110

01 WHITE 02 BLACK 05 ALU .12 GOLD



	reference	2020HW/WW/W
	cut-out mm	Ø 105
	led wattage	12.9 W / 19 W
	power supply	350 mA DC / 500 mA DC
468	lamp	COB 2700, 3000, 4000 K / CRI 97+
IP20	optics	37°




NautaDutilh, Studio Rublek




Private house, I/O Architects

CAST 110 CONCRETE



reference	2029HW/WW/W
led wattage	12.9 W / 19 W
power supply	350 mA DC / 500 mA DC
lamp	COB 2700, 3000, 4000 K / CRI 97+
optics	37°
466	
IP20	CE



CAST LED CONCRETE PACK

For fair faced concrete

reference	50050
1750	




Private house, I/O Architects




Office, DontDIY Studio

CAST 110 SEMISURFACE

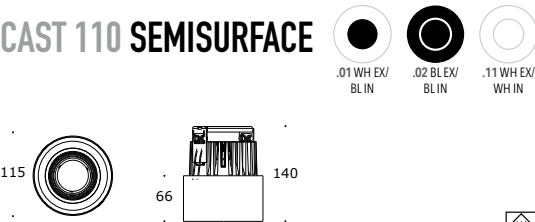

	reference	2021HW/WW/W
	cut-out mm	Ø 105
	led wattage	12.9 W / 19 W
	power supply	350 mA DC / 500 mA DC
820	lamp	COB 2700, 3000, 4000 K / CRI 97+
IP20	optics	37°

CAST TRIMLESS SQ



	reference	2024HW/WW/W
		Dim-to-Warm available
	led wattage	12.9 W
	power supply	350 mA DC
240	lamp	COB 2700, 3000, 4000 K / CRI 97+
IP44/20	optics	32°

TRIMLESS FRAME

reference	50047
cut out	96x96


BLED



BLED is a recessed downlight with a polycarbonate diffuser available in round or square version. Frame can be in powder coated steel or in brushed stainless steel.




BLED ROUND



	reference	2175HW/WW/W
	cut-out mm	Ø 74
	led wattage	12 W
240	power supply	350 mA DC
IP44/20	lamp	COB 2700, 3000, 4000 K / CRI 97+

BLED SQ



	reference	2176HW/WW/W
	cut-out mm	Ø 74
	led wattage	12 W
240	power supply	350 mA DC
IP44/20	lamp	COB 2700, 3000, 4000 K / CRI 97+



Private house


KVADRA



A recessed mounted square shaped downlight. Deeply recessed lamp position for visual soft appearance. Frame can be in powder coated steel or in brushed stainless steel. Available in 230V/GU10 versions suitable for LED retrofits.



KVADRA SLIM




reference	2251
cut-out mm	75x75
178  wattage	max 35 W
IP20  lamp	 QPAR51
230V  base	GU10



Private house, Back2architecture


KVADRA



reference	2252
cut-out mm	75x75
240  wattage	max 35 W
IP20  lamp	 QPAR51
230V  base	GU10




KVADRA POINT




reference	2254
cut-out mm	75x75
wattage	max 35 W
IP20	lamp QPAR51
230V	base GU10




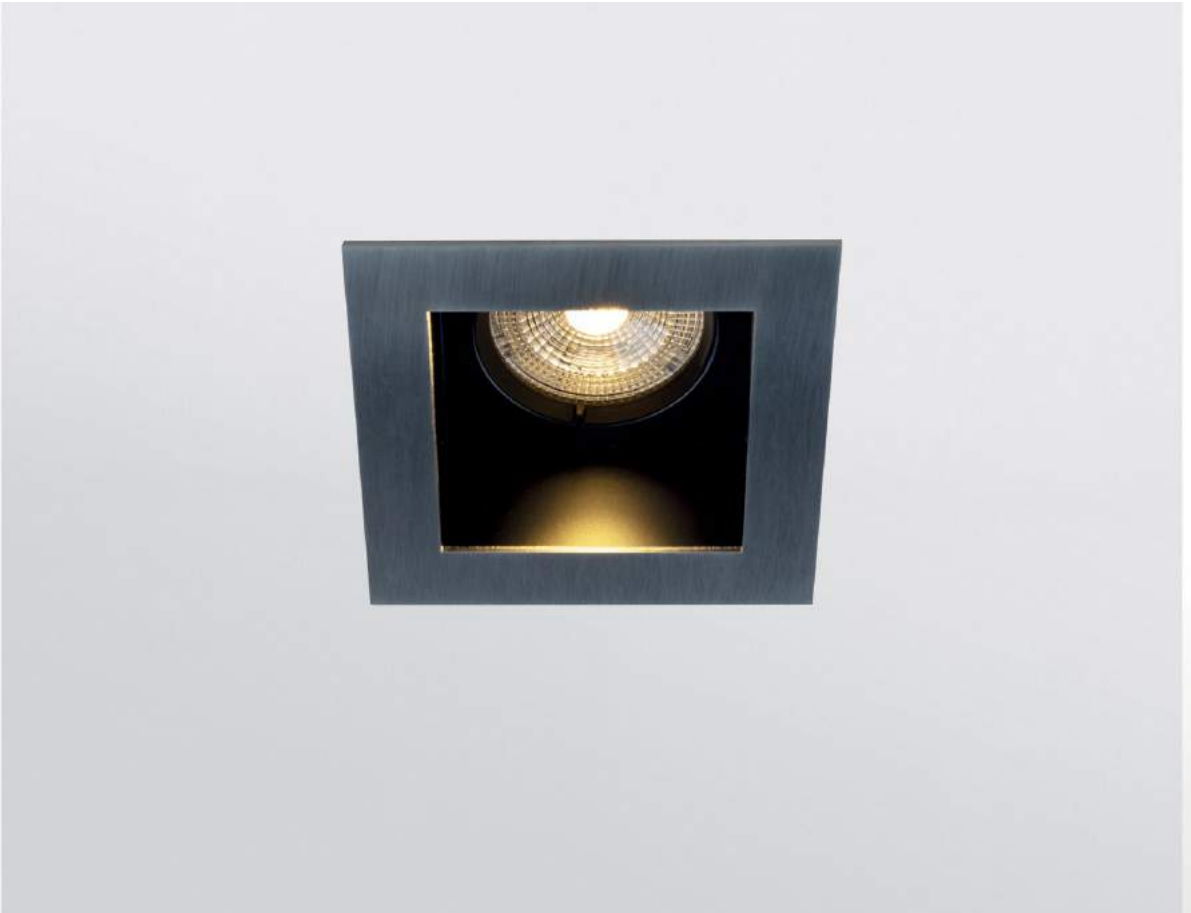

KVADRA ROUND BACK




reference	2352
cut-out mm	Ø 90
260  wattage	max 35 W
IP20  lamp	 QPAR51
230V  base	GU10



reference	2080HW/WW/W
cut-out mm	Ø 60
led wattage	12.9 W
 power supply	350 mA DC
160  lamp	COB 2700, 3000, 4000 K / CRI 97+
IP20  optics	32°


CYL



Fixed round recessed or semi-recessed downlight with small trim and deeply recessed LED position for minimal visual impact.




LUPO



A range of recessed adjustable spotlights for accent lighting with trimmed and trimless options. Deeply recessed lamp position for minimal visual impact and 355° rotation and 35° tilt adjustment. Available in 230V/GU10 version suitable for LED retrofits.




LUPO GU10 1X1



reference	2106
cut-out mm	98x98
330 wattage	max 35 W
IP20 lamp	QPAR51
230V base	GU10

LUPO GU10 2X1




reference	2107
cut-out mm	183x98
770 wattage	max 2x35 W
IP20 lamp	QPAR51
230V base	GU10



Private house, Pavlovarchitects




LUPO GU10 TRIMLESS 1X1



reference	2121
cut-out mm	98x98 accessible ceiling 105x98 non-accessible ceiling
330  	wattage max 35 W
IP20 	lamp  QPAR51
230V 	base GU10

LUPO GU10 TRIMLESS 2X1

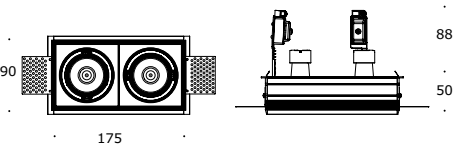

reference	2122
cut-out mm	183x98
750  	wattage max 2x35 W
IP20 	lamp  QPAR51
230V 	base GU10



Private house, Pavlovarchitects

SITTO


A range of recessed adjustable spotlights for accent lighting with trimmed and trimless options. Gimbal tilt adjustment. Available in 12V/G53 suitable for LED retrofits.



Business lounge FC Groningen, BuroLicht




SITTO 1X1



		reference	5001
		cut-out mm	160x160
770		wattage	max 50 W
IP20		lamp	QR-LP111
12V	CE	base	G53


SITTO 2X1



		reference	5002
		cut-out mm	306x160
1480		wattage	max 2x50 W
IP20		lamp	QR-LP111
12V	CE	base	G53




SITTO TRIMLESS 1X1




		reference	5011
700		wattage	max 50 W
IP20		lamp	QR-LP111
12V	CE	base	G53

SITTO TRIMLESS 2X1




		reference	5012
1320		wattage	max 2x50 W
IP20		lamp	QR-LP111
12V	CE	base	G53


SITTO PLASTER KIT




SITTO TRIMLESS FRAME



SITTO CONCRETE PACK



SITTO CONCRETE PACK FOR PLASTER KIT



	KIT 1X1	KIT 2X1
reference	50001	50002
AxB mm	97x97	97x193
cut-out	164x164	310x164

	FRAME 1X1	FRAME 2X1
reference	50011	50012
AxB mm	154x154	298x154
cut-out	158x158	302x158

For fair faced concrete

	BOX 1X1	BOX 2X1
reference	50021	50022
AxB mm	154x154	298x154
cut-out mm	177x175	321x175
	825 🏠	1300 🏠

	BOX 1X1	BOX 2X1
reference	50026	50027
	990 🏠	1480 🏠



Private house, Groningen, Sommer & Arends



Private house, Pavlovarchitects



SITTO ROUND



170



80

reference	5082
cut-out mm	Ø 160
wattage	max 50 W
lamp	QR-LP111
base	G53




SITTO LED

A range of round and square recessed adjustable high lumen output LED downlights for accent lighting. Versions available with trimmed and trimless options. A separate trimless frame is supplied for the trimless version.




SITTO LED BOX 1X1



530 lm		reference	50700
IP20		cut-out mm	160x160

SITTO LED BOX 2X1




800 lm		reference	50701
IP20		cut-out mm	306x160



Chocolaterie Marloes Uelsen, Interior Vitamins + Valk design




SITTO LED TRIMLESS BOX 1X1




IP20	CE	reference	50705
------	----	-----------	-------

SITTO LED TRIMLESS BOX 2X1




IP20	CE	reference	50706
------	----	-----------	-------

SITTO LED TRIMLESS FRAME



	FRAME 1 X 1	FRAME 2 X 1
reference	50030	50031
A x B mm	160 x 160	315 x 160
cut-out mm	164 x 164	320 x 164




SITTO LED ROUND BOX



500	CE	reference	50750
IP20	CE	cut-out mm	Ø 160

SITTO LED HEAD



	reference	50710/WW/W 50712/WW/W
	led wattage	38.5 W
	power supply	1080 mA DC
	lamp	COB 3000, 4000 K / CRI 95+
600 	 optics	spot 24° flood 42°


SHAIBA



A range of recessed adjustable spotlights for accent lighting with trimmed and trimless options. The compact tube can be completely sunk or outside the ceiling and has a 360° rotation and 60° tilt adjustment. Available in 230V/GU10 version suitable for LED retrofits.




SHAIBA GU10 1X1



reference	5215
cut-out mm	98x98
wattage	max 35 W
lamp	QPAR51
base	GU10

SHAIBA GU10 2X1




reference	5216
cut-out mm	98x196
wattage	max 2x35 W
lamp	QPAR51
base	GU10



Office, Radina Gesheva Studio




SHAIBA GU10 1X1 TRIMLESS



		reference	5228
490		wattage	max 35 W
IP20		lamp	QPAR51
230V		base	GU10

SHAIBA GU10 2X1 TRIMLESS




		reference	5229
865		wattage	max 2x35 W
IP20		lamp	QPAR51
230V		base	GU10



Private house, Radina Gesheva Studio

SHAIBA TRIMLESS FRAME



	FRAME 1X1	FRAME 2X1
reference	56011	56012
AxB mm	97x97	97x193
cut-out	101x101	101x195


SHAIBA QR



A range of recessed adjustable spotlights for accent lighting with trimmed and trimless options. The semi-recessed head has a 360° rotation and 60° tilt adjustment. Available in 12V/G53 version.




SHAIBA QR 1X1



		reference		5231
		cut-out mm		116x116
510			wattage	max 50 W
IP20			lamp	 QR-LP111
12V			base	G53

SHAIBA QR 2X1




	reference	5232
	cut-out mm	116x256
1040 	wattage	max 2x50 W
IP20 	lamp	 QR-LP111
12V 	base	G53






SHAIBA QR 1X1 TRIMLESS




490		reference	5233
IP20		wattage	max 50 W
12V		lamp	QR-LP111
		base	G53

SHAIBA QR 2X1 TRIMLESS



1000		reference	5234
IP20		wattage	max 2x50 W
12V		lamp	QR-LP111
		base	G53

SHAIBA QR TRIMLESS FRAME



	FRAME 1X1	FRAME 2X1
reference	56015	56016
AxB mm	115x115	115x255
cut-out mm	120x120	120x260




Private apartment, Vienna, Back2architecture

D O T S

Linear recessed downlight with 12 optical elements with high level of controlled glare for visual comfort - UGR<16. Available as trimmed and trimless version.



D O T S




reference	2104HW/WW/W
cut out	308x40
led wattage	14.5/20 W
power supply	350/500 mA DC
lamp	SMD 3K/4K CRI 90+
optics	42°



The Mall



D O T S TRIMLESS



reference	2105 HW/WW/W
cut out	304x38
led wattage	14.5/20 W
power supply	350/500 mA DC
lamp	SMD 3K/4K CRI 90+
optics	42°


TRIMLESS FRAME

reference	56025
-----------	-------

P O I N T E R 30 RECESS



Recessed adjustable LED spotlight for accent lighting. Anti-glare baffle for minimal glare and full 360° rotation and 80° tilt adjustment.



reference		2400HW/WW/W
cut-out mm		Ø 45
led wattage		7 W
power supply		max 200 mA DC
190 	lamp	COB 2700, 3000, 4000 K / CRI 97+
IP20 	optics	44°



Restaurant Koto, Kumaro Office


POINTER 60 RECESS



Recessed adjustable LED spotlight for accent lighting. Anti-glare baffle for minimal glare and full 360° rotation and 80° tilt adjustment.



POINTER 60 RECESS LED



	reference	2405HW/WW/W 2406HW/WW/W Dim-to-Warm available
	cut-out mm	Ø 55
	led wattage	12.9 W
	power supply	350 mA DC
500	lamp	COB 2700, 3000, 4000 K / CRI 97+
IP20	optics	32° 16°

POINTER 60 RECESS GU10

	reference	2407
	cut-out mm	Ø 55
	led wattage	max 35 W
410	lamp	QPAR51
IP20	base	GU10




Constantinoff, MMXX architects

SURFACE

ARK



A small surface mounted cylinder downlight.
Available in 230V/GU10 version suitable for LED retrofits.



reference		3001
250	led wattage	max 35 W
IP20	lamp	QPAR51
230V	base	GU10




Private house, Pavlovarchitects



CAST SURFACE



A tubular shaped fixed surface mounted downlight with deeply recessed lamp position for minimal visual impact. Available in 230V/GU10 version.



		reference	3107
760	led	led wattage	max 35 W
IP20	lamp	lamp	QPAR51
230V	base	base	GU10



PaySafe Office, Cachè Atelier


CAST LED SURFACE



A tubular shaped fixed surface mounted downlight with deeply recessed LED position for minimal visual impact.



CAST LED SURFACE

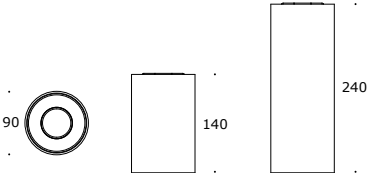

	140 mm	240 mm
reference	3116HW/WW/W	3117HW/WW/W
	not dimmable	Dim-to-Warm available phase cut dimmable
led wattage	12.9 W	12.9 W
power supply	350 mA DC	350 mA DC
lamp	COB 2700, 3000, 4000 K / CRI 97+	COB 2700, 3000, 4000 K / CRI 97+
optics	32°	32°
	850 lm	1535 lm



Private house, Theodoor Interior Concepts




Kotlet, ZOOM studio

CAST SQ LED SURFACE



	140 mm	240 mm
reference	3120HW/WW/W	3121HW/WW/W
	not dimmable	Dim-to-Warm available phase cut dimmable
led wattage	12.9 W	12.9 W
power supply	350 mA DC	350 mA DC
IP20	lamp	COB 2700, 3000, 4000 K / CRI 97+
230V	optics	COB 2700, 3000, 4000 K/CRI 97+
	32°	32°
	850 lm	850 lm

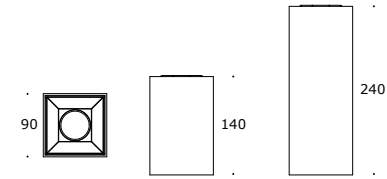


CUBE



A small surface mounted cube shaped downlight. Available in 230V/GU10 version suitable for LED retrofits.



Private house, Back2Architecture



reference		3012
272	led wattage	max 50 W
IP20	lamp	QPAR51
230V	base	GU10


POINTER 60 BASE



Spotlight with base in tubular form with deeply recessed lamp position for minimal visual impact. Suitable for accent lighting. Available in 230V/GU10 version.



POINTER 60 BASE GU10



reference	4610
500 wattage	max 35 W
IP20 lamp	QPAR51
230V base	GU10

POINTER 60 BASE COB

Non-dimmable driver	
reference	4611HW/WW/W 4612HW/WW/W
500 wattage	12.9 W
IP20 lamp	COB 2700, 3000, 4000 K / CRI 97+
230V optics	32° 16°



Private House, Hush architects

P O I N T E R 60 TRACK



01 WHITE



02 BLACK

3 phase track spotlight. Track spotlight in tubular form with deeply recessed lamp position for minimal visual impact. Suitable for accent lighting.




Private House, Back2light



Brasserie de Kastanjehoeve Glimmen, BuroLicht



Private house, Back2Architecture

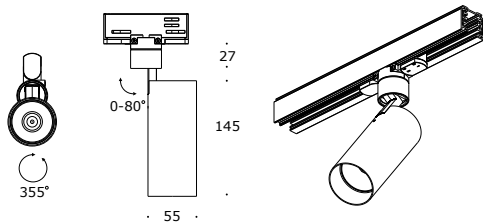

POINTER 60 GU10 TRACK

390		reference	4601
IP20		wattage	max 35 W
230V		lamp	QPAR51
		base	GU10

POINTER 60 COB TRACK

460		Non-dimmable driver	
reference	4605 4606		
wattage	12.9 W		
IP20		lamp	COB 2700, 3000, 4000 K / CRI 97+
230V		optics	32° 16°

TRACK

EUTRAC	track 4m	live end	straight coupler	L coupler	ceiling clip
25-406 white 25-402 black	earth right 555 1 1201 6 white 555 1 1201 2 black	555 1 1206 6 white 555 1 1206 2 black	earth outside 555 1 1209 6 white 555 1 1209 2 black	99-018-6 white 99-018-2 black	
	earth left 555 1 1202 6 white 555 1 1202 2 black		earth inside 555 1 1210 6 white 555 1 1210 2 black	end cap	
				555 1 1217 6 white 555 1 1217 2 black	

P O I N T E R 48V TRACK



01 WHITE




02 BLACK



Private house, Back2Light




POINTER 30 48 V TRACK

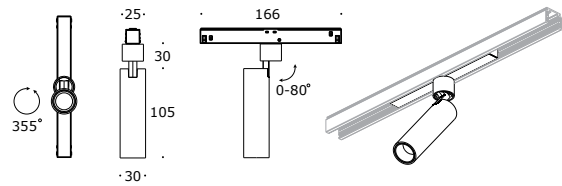

DALI driver available	
reference	2410HW/WW/W
led wattage	7 W
power supply	48 V DC
lamp	COB 2700, 3000, 4000 K / CRI 97+
optics	44°

POINTER 30 DOUBLE 48 V TRACK

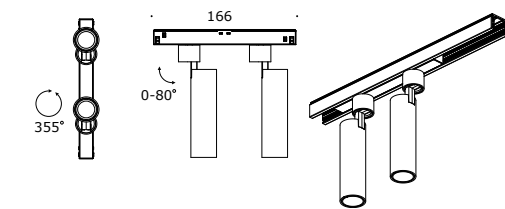

DALI driver available	
reference	2411HW/WW/W
led wattage	2x7 W
power supply	48 V DC
lamp	COB 2700, 3000, 4000 K / CRI 97+
optics	44°




Private house, Back2Light



Restaurant Koto, Kumaro office

POINTER 60 48 V TRACK

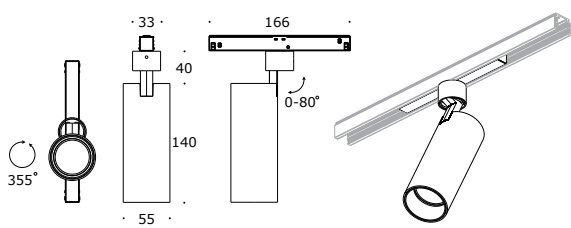

DALI driver available	
reference	2415HW/WW/W 2416HW/WW/W Dim-to-Warm available
led wattage	12.9 W
power supply	48 V DC
lamp	COB 2700, 3000, 4000 K / CRI 97+
optics	32° 16°


POINTER 48 V TRACK ACCESSORIES

48V surface track 2 m 3 m 4 m	end cap	48V trimless track 2 m 3 m 4 m	end cap	end feed	straight coupler	L coupler
reference 91020 91030 91040	91001	91120 91130 91140	91002	9501	9503	9511

LUPO BOX



A box shaped surface mounted adjustable spotlights for accent lighting. Deeply recessed lamp position for minimal visual impact. 355° rotation and 35° tilt adjustment. Available in 230V/GU10 version suitable for LED retrofits.



reference	51911
wattage	max 2x35 W
lamp	QPAR51
base	GU10

SITTO BOX




A range of box shaped surface-mounted adjustable spotlights for accent lighting. Gimbal tilt adjustment. Available in 12V/G53 suitable for LED retrofits as well.




Private house, Germany

SITTO BOX 1X1



reference	5090
1530  wattage	max 50 W
IP20  lamp	QR-LP111
230V  base	G53

SITTO BOX 2X1



reference	5091
2500  wattage	max 2 x 50 W
IP20  lamp	QR-LP111
230V  base	G53

SITTO EXTERNAL



A range of surface-mounted adjustable spotlights for accent lighting. Gimbal tilt adjustment. Available in 12V/G53 suitable for LED retrofits as well.



SITTO EXTERNAL 2X1

		reference	50411
	1130	wattage	max 2 x 50 W
	IP20	lamp	QR-LP111
	230V	base	G53




Het Brodshoes Rijssen, Optica

LELO SURFACE



LELO is available in 3 sizes and can be surface suspended or wall/ceiling mounted. It consists of circular aluminium profile and an acrylic diffuser for uniform illumination. Integrated or remote control gear that can be fixed or touch/ DALI dimmable. Can be ordered in DOWN or UP/DOWN versions in 900mm, 1200mm or 1500mm diameter.







LELO SURFACE BASE

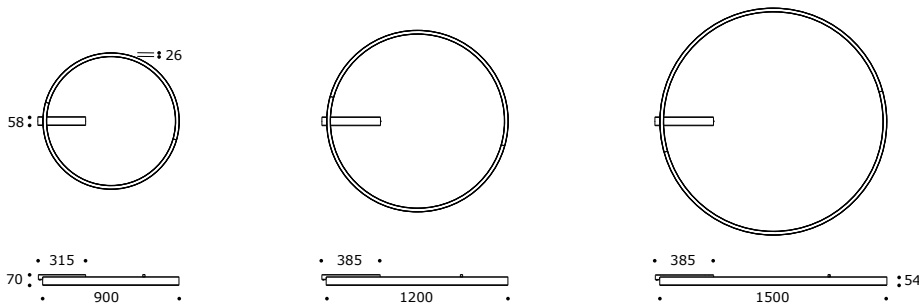


	900 mm	1200 mm	1500 mm
reference	42110HW/WW/W	42111HW/WW/W	42112HW/WW/W
reference DALI	42110DDHW/WW/W	42111DDHW/WW/W	42112DDHW/WW/W
wattage	58 W	70 W	92 W
 voltage	230 V	230 V	230 V
 K	2700/3000/4000 K	2700/3000/4000 K	2700/3000/4000 K
  CRI	95+	95+	95+
	3800 lm	5000 lm	6200 lm



L E L O SURFACE CEILING FIX

			
			
	900 mm	1200 mm	1500 mm
reference	42120HW/WW/W	42121HW/WW/W	42122HW/WW/W
wattage	58 W	70 W	92 W
 voltage	24 V	24 V	24 V
 K	2700/3000/4000 K	2700/3000/4000 K	2700/3000/4000 K
  CRI	95+	95+	95+
Gear to be ordered separately.	 3100	 4200	 5300

L E L O SURFACE ACCESSORIES

		
	recessed power feed TRIMLESS	recessed power feed
	85	85
reference	00050	00051
Gear not included.		



PENDANT

LELO PENDANT



01 WHITE



02 BLACK


LELO is available in 3 sizes and can be surface suspended or wall/ceiling mounted. It consists of circular aluminium profile and an acrylic diffuser for uniform illumination. Integrated or remote control gear that can be fixed or touch/DALI dimmable. Can be ordered in DOWN or UP/DOWN versions in 900mm, 1200mm or 1500mm diameter.




Worldquant Office, Back2architecture



Worldquant Office, Back2architecture

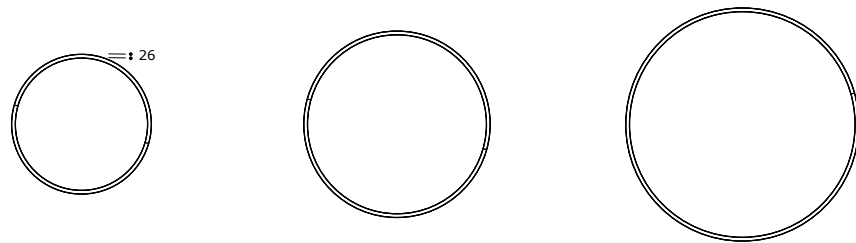


L E L O PENDANT DOWN

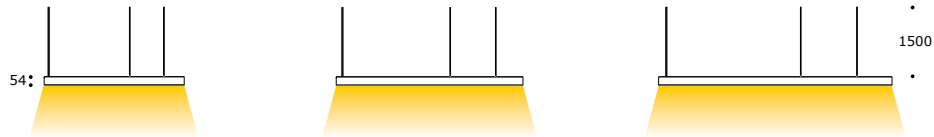



	900 mm	1200 mm	1500 mm
reference	42101HW/WW/W	42102HW/WW/W	42103HW/WW/W
wattage	58 W	70 W	92 W
 voltage	24 V	24 V	24 V
 K	2700/3000/4000 K	2700/3000/4000 K	2700/3000/4000 K
  CRI	95+	95+	95+
	3200 	4300 	5400 

L E L O PENDANT UP/DOWN

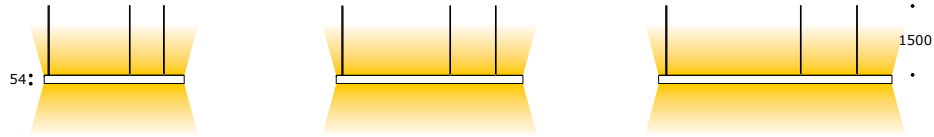


	900 mm	1200 mm	1500 mm
reference	42105HW/WW/W	42106HW/WW/W	42107HW/WW/W
wattage	116 W	140 W	184 W
 voltage	24 V	24 V	24 V
 K	2700/3000/4000 K	2700/3000/4000 K	2700/3000/4000 K
  CRI	95+	95+	95+
Gear to be ordered separately.	3700 	4800 	5900 

LELO ACCESSORIES

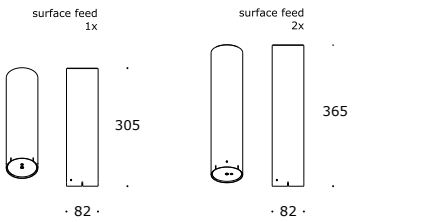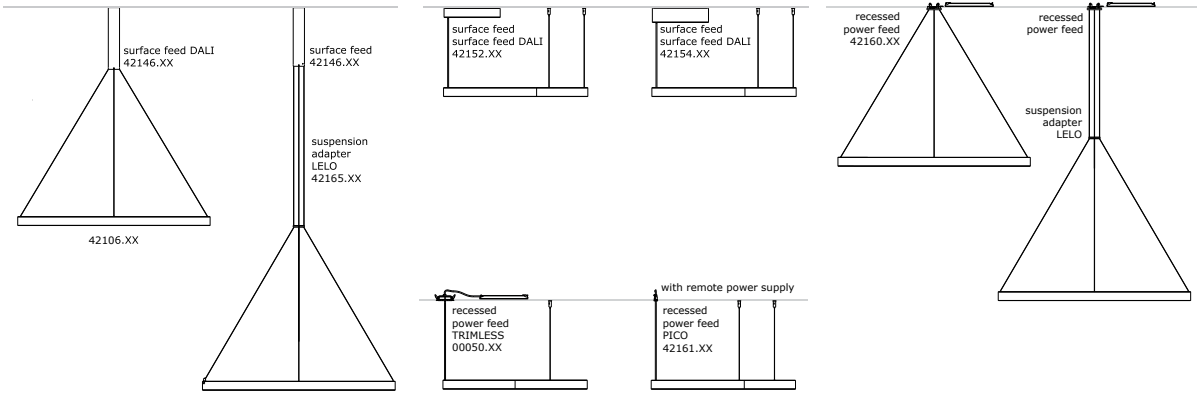

surface feed 1x				
reference	42144	42144DD	42148	42148DD
wattage	1x60 W	1x60 W DALI	1x100 W	1x100 W DALI

surface feed 2x				
reference	442146	42146DD	42150	42150DD
wattage	2x60 W	2x60 W DALI	2x100 W	2x100 W DALI

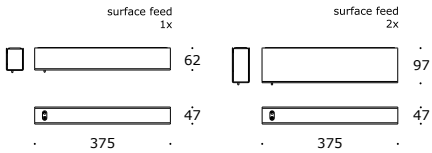

surface feed 1x		
reference	42152	42152DD
wattage	1x100 W	1x100 W DALI

surface feed 2x		
reference	42154	42154DD
wattage	2x100 W	2x100 W DALI



· 85 ·

recessed power feed
TRIMLESS

reference 00050



· 85 ·

recessed power feed

reference 00051



· 90 ·

recessed power feed
with suspension

reference 42160



holder set
3 pcs

reference 42161



holder set
4 pcs for LELO1500

reference 42162



· 82 ·

Suspension
adapter LELO

reference 42165

Gear not included.



Worldquant Office, Back2architecture


K A M B A N A



Suspended light fitting for indoor use with industrial looks. Traditional E27 socket for easy choice of LED retrofits.



Private house, Studio Mode




reference	4090
2400 	wattage
IP20 	lamp
230V 	base
	E27

	Suspension set 1.5 m	Suspension set 4 m
reference	40900	40901

SHU



Shu is available in 2 sizes for suspended mounting from the ceiling. The reflector flaps can be fixed at different positions for creating various light spread.

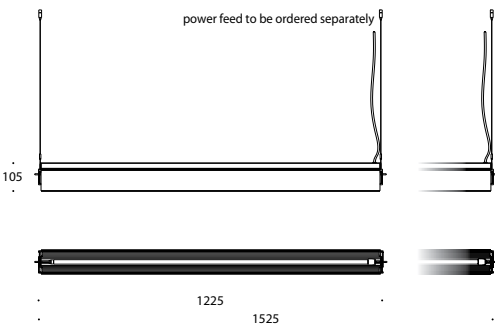

	1225 mm	1525 mm
reference	4050	4051
 wattage	26 W	37 W
 lamp	T5 / led mains / AC Osram substitute Philips led tube mains	T5 / led mains / AC Osram substitute Philips led tube mains
		
 IP20		
base	G5	G5
	2730 	3660 

Powerfeed - page 189





TUBA




TUBA is available in 2 sizes for suspended mounting. It consists of cylindrical tube made of satin PMMA for uniform illumination.




Red apple, Aedes Studio

T U B A SUSPENSION

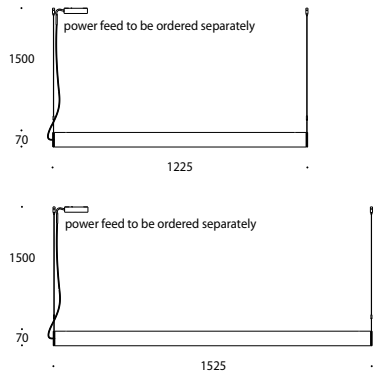

LED		1225 MM	1525 MM
	reference	4295WW	4296WW
	wattage	26 W	32.5 W
	lamp	3000 K	3000 K
		2160	2550

T U B A SURFACE

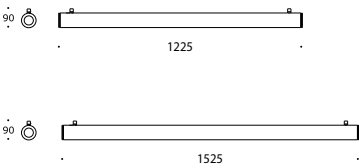

LED		1225 MM	1525 MM
	reference	4281WW	4282WW
	wattage	26	32.5
	lamp	3000 K	3000 K
		2250	2650

Powerfeed - page 189


Office WURTH

WALL

WAFER BOX



A box shaped luminaire designed for the illumination of stairs and corridors.
Asymmetrical light distribution.




		reference	31810WW/W
		wattage	1.2W
150		power supply	350 mA DC
IP20	CE	lamp	3000 K/4000 K

Standard box for installing LED power supply (not included)



Private house


WAFER



Wall recessed luminaire, designed for the illumination of stairs and corridors. Asymmetrical light distribution.




WAFER SQUARE



	reference	31801WW/W
	cut-out mm	54x58
100	wattage	1.2 W
IP20	power supply	350 mA DC


WAFER WIDE



	reference	31802WW/W
	cut-out mm	122x58
200	wattage	2.4 W
IP20	power supply	350 mA DC




PLASTER KIT



	SQUARE	WIDE
reference	31881	31882
AxB mm	128x101	196x101
cut-out mm	58x62	126x62

CONCRETE PACK



	SQUARE	WIDE
reference	31891	31892
AxB mm	128x101	196x101
CxD mm	131x73	199x73

FILI

01 WHITE 02 BLACK Round wall fixture with soft direct/indirect light.



Non-dimmable driver	
570	reference
IP20	wattage
230V	lamp
2550WW	
2x3 W	
3000K	

FLEXI

01 WHITE 02 BLACK Wall fixture with flexible arm suitable as reading lamp. Versions with surface or recessed mounting. FLEXI VV - wall fixture for recessed mounting with turn and tilt head suitable as reading lamp.




Non-dimmable driver	
355	reference
IP20	wattage
230V	power supply
40534WW	
1.8 W	
500 mA DC	

Standard box for installing LED power supply (not included)




Van der Valk Almelo, Valk Design


FLEXI

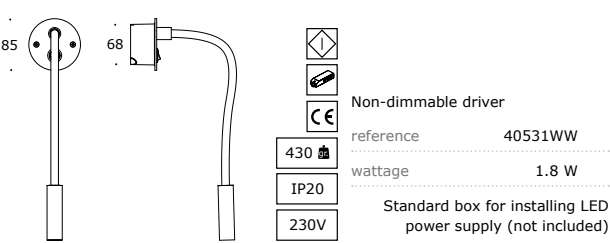

FLEXI SQ

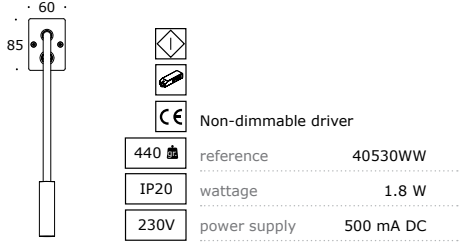

FLEXI BASE

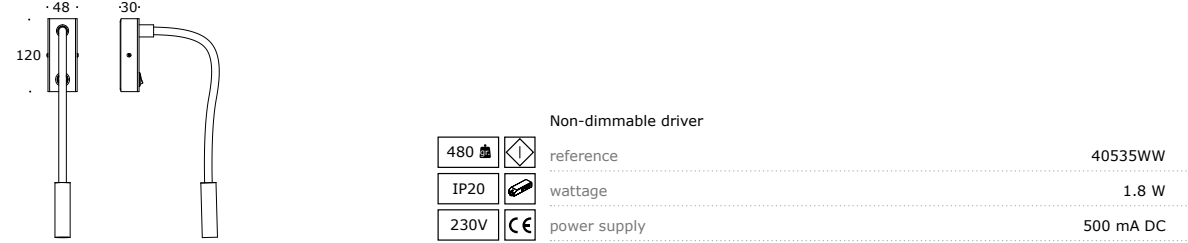

PROFILES

LENTA




LENTA is a surface mounted wall/ceiling luminaire with asymmetrical light distribution. It consists of an aluminium extruded profile with integrated gear and opal or clear diffuser. Available in fixed output or DALI/touch dim. Made-to-measure.



Private house, Back2architecture



Private house, Back2light

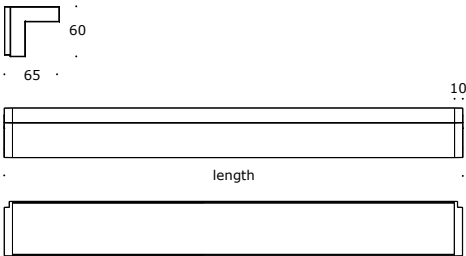

reference	7560HW/WW/W
length	1000 mm
wattage	26 W / 26 W / 23 W
K HW/WW/W	2700 / 3000 / 4000 K
CRI	90+
Can be ordered in multiples of 100 mm. Minimal length - 300 mm.	

IP20		Lenta gear / to be ordered separately		
	reference	75FF060	75FF100	75FF100DD / pushdim / dali
	wattage	60 W	100 W	100 W

L E N T A A C C E S S O R I E S

	profile/m	endplates/set	wall fixing	straight junction
reference	75500	75501	75502	75508


STRIP



STRIP is a linear lighting profile that can be recessed, surface mounted (wall or ceiling) or suspended. It consists of an aluminium extruded profile with an integrated gear and opal diffuser. Available in fixed output or DALI/touch dim. Made-to-measure in multiples of 140mm plus 20mm for tolerance and end caps. Both suspended as wall mounted versions can be used with up- and downlight.



PaySafe Office, Cachè Atelier

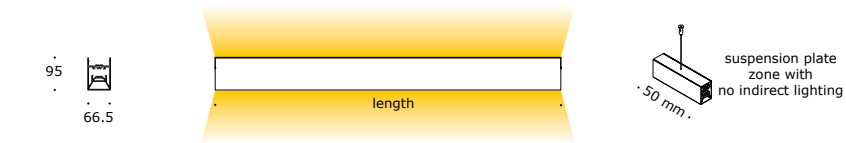

STRIP LED MODULE

length	140 mm	280 mm	560 mm
reference	16L014HW/WW/W	16L028HW/WW/W	16L056HW/WW/W
wattage 350/500 mA	3.1 / 4.5 W	6.2 / 9 W	12.4 / 18 W
K HW/WW/W	2700 K/3000 K/4000 K	2700 K/3000 K/4000 K	2700 K/3000 K/4000 K
CRI	95+	95+	95+

STRIP GEAR

	reference	16F020	16F020DD/ pushdim/dali	16F060	16F060DD/ pushdim/dali	16F090	16F090DD/ pushdim/dali
	wattage	20 W	20 W	60 W	60 W	90 W	90 W




Porsche private collection



Thialf Heerenveen, Oving

STRIP ACCESSORIES

								
	profile/m	endplate	suspension single	straight junction	90° junction	90° vertical junction	suspension bracket	ceiling fixing
reference	16000	16001	1.5 m – 16002 3 m – 16003	16004	16005	16006	16008	16011

STRIP INCASSO






STRIP INCASSO is a linear lighting profile for recessed mounting. It consists of an aluminium extruded profile with an integrated gear and opal diffuser. Available in fixed output or DALI/touch dim. Made-to-measure in multiples of 140mm plus 20mm for tolerance and end caps.





STRIP INCASSO LED MODULE

				
length	140 mm	280 mm		560 mm
reference	16L014HW/WW/W	16L028HW/WW/W		16L056HW/WW/W
wattage 350/500 mA	3.1 / 4.5 W	6.2 / 9 W		12.4 / 18 W
K HW/WW/W	2700 K/3000 K/4000 K	2700 K/3000 K/4000 K		2700 K/3000 K/4000 K
CRI	95+	95+		95+

STRIP INCASSO GEAR

 	reference	16F020	16F020DD/ pushdim/dali	16F060	16F060DD/ pushdim/dali	16F090	16F090DD/ pushdim/dali
	wattage	20 W	20 W	60 W	60 W	90 W	90 W

STRIP INCASSO ACCESSORIES

						
	profile/m	endplate	straight junction	90° junction	90° vertical junction	suspension bracket
reference	16100	16101	16004	16005	16006	16108




Private house

STRIP MINI




STRIP mini is a linear lighting profile that can be recessed, surface mounted (wall or ceiling) or suspended. It consists of an aluminium extruded profile with an integrated gear and opal diffuser. Available in fixed output or DALI/touch dim. Made-to-measure in multiples of 140mm plus 20mm for tolerance and end caps. Both suspended as wall mounted versions can be used with up- and downlight. Optional with multi optics and/or double POINTER30.

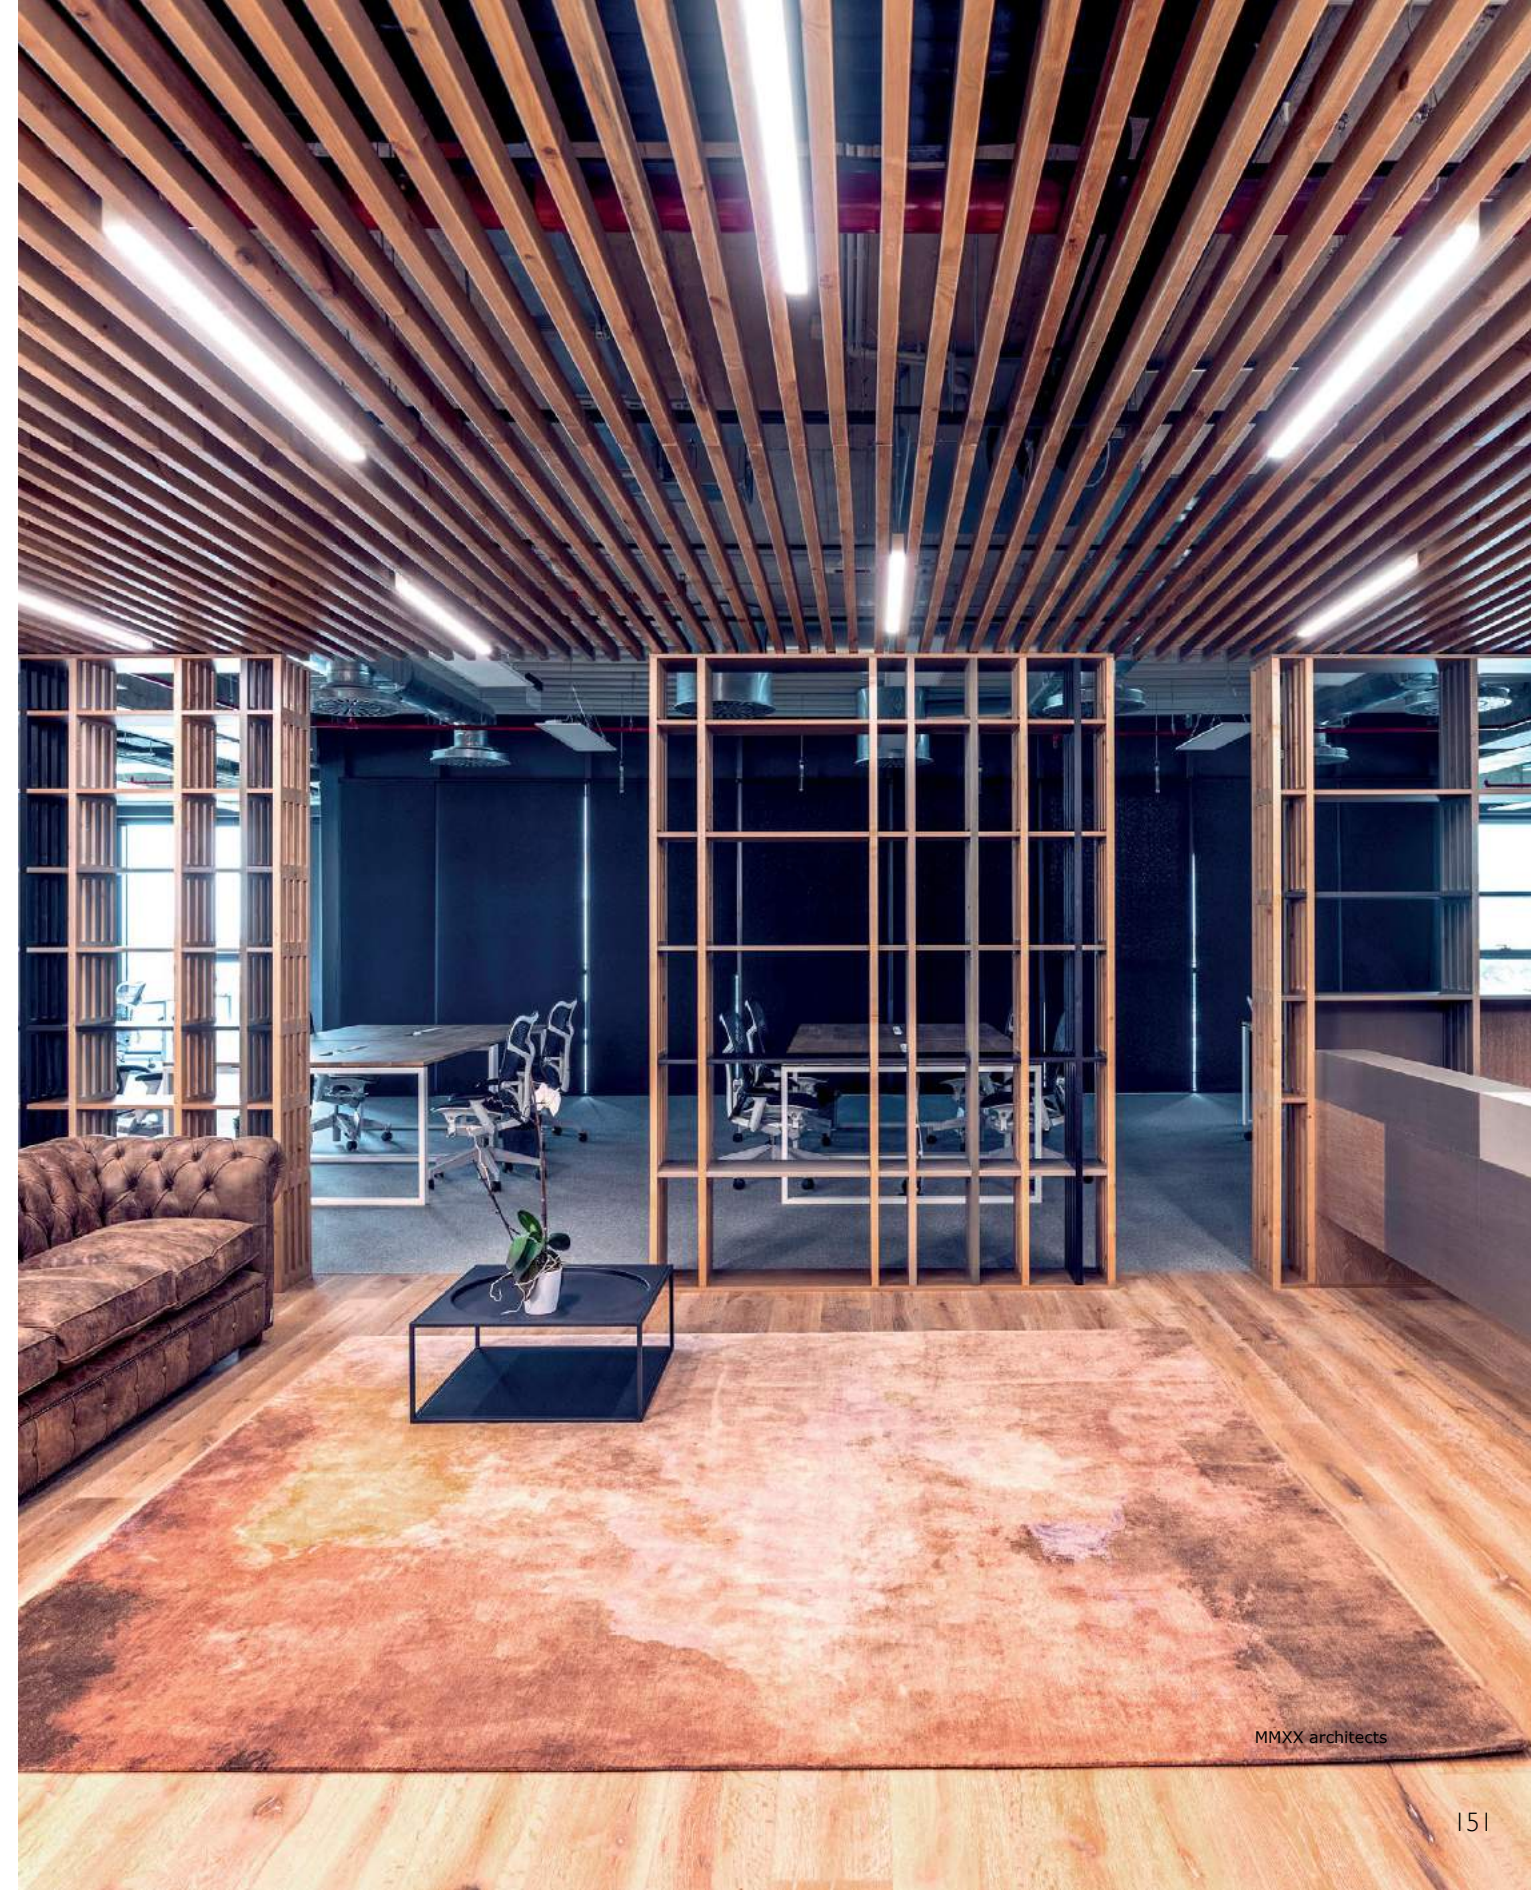

MMXX architects





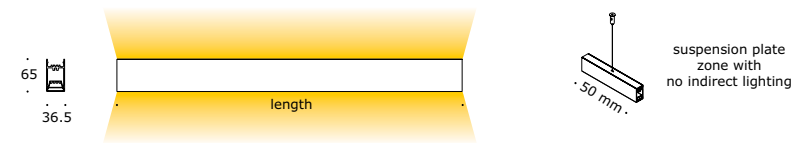

STRIP MINI LED MODULE

length	140 mm	280 mm	560 mm
reference	14L014HW/WW/W	14L028HW/WW/W	14L056HW/WW/W
wattage 350/500 mA	3.1 / 4.5 W	6.2 / 9 W	12.4 / 18 W
K HW/WW/W	2700 K/3000 K/4000 K	2700 K/3000 K/4000 K	2700 K/3000 K/4000 K
CRI	95+	95+	95+

STRIP MINI GEAR

		reference	14F020	14F020DD/ pushdim/dali	14F060	14F060DD/ pushdim/dali	14F090	14F090DD/ pushdim/dali
IP20	CE	wattage	20 W	20 W	60 W	60 W	90 W	90 W

STRIP MINI ACCESSORIES

	profile/m	endplate	suspension single	straight junction	90° junction
reference	14000	14001	1.5 m - 14002 3 m - 14003	14004	14005


	90° vertical junction	suspension bracket	feed box	wall fixing	ceiling fixing	Cover/m
reference	14006	14008	14009	14010	14011	14200



Office, DontDIY Studio




STRIP MINI MULTIOPTICS



reference	14093HW/WW/W
led wattage	12x1.2 W/14.5 W
lamp	
optics	42°
K WW/W	3000/4000 K
CRI	90+



STRIP MINI POINTER 30



reference	14092HW/WW/W
led wattage	2x7 W
lamp	COB
optics	44°
K WW/W	2700/3000/4000 K
CRI	97+

STRIP MINI GEAR

reference	14F020	14F020DD/pushdim/dali
wattage	20 W	20 W



reference	14F060	14F060DD/pushdim/dali
wattage	60 W	60 W



reference	14F090	14F090DD/pushdim/dali
wattage	90 W	90 W



STRIP MINI POINTER 30 GEAR

reference	14F10-42
wattage	10-42 W / 1-3 modules



reference	14F10-42DD/ pushdim/dali
wattage	10-42 W / 1-3 modules




Private house, Lago Design

STRIP MINI SLIM



STRIP mini Slim is a linear lighting profile that can be recessed, surface mounted (wall or ceiling) or suspended. It consists of an aluminium extruded profile with an integrated gear and opal diffuser. Available in fixed output or DALI/touch dim, up or downlight. Made-to-measure in multiples of 140mm plus 20mm for tolerance and end caps. Optional with multi optics and/or double POINTER30.





STRIP MINI SLIM LED MODULE

length	140 mm	280 mm	560 mm
reference	14L014HW/WW/W	14L028HW/WW/W	14L056HW/WW/W
wattage 350/500 mA	3.1 / 4.5 W	6.2 / 9 W	12.4 / 18 W
K HW/WW/W	2700 K/3000 K/4000 K	2700 K/3000 K/4000 K	2700 K/3000 K/4000 K
CRI	95+	95+	95+

STRIP MINI SLIM GEAR

		reference	14F1035	14F1035/ pushdim/dali	14F1060	14F1060DD/ pushdim/dali	14F1010
IP20	CE	wattage	35 W	35 W	60 W	60 W	100 W

STRIP MINI SLIM ACCESSORIES

	profile/m	endplate	suspension single	straight junction	90° junction
reference	14100	14101	1.5 m - 14102 3 m - 14103	14104	14105


	90° vertical junction	suspension bracket	feed box	wall fixing	ceiling fixing	Cover/m
reference	14106	14108	14009	14010	14111	14200



Private house, I/O Architects




STRIP MINI SLIM MULTIOPTICS



reference	14193HW/WW/W
led wattage	12x1.2 W/15 W
lamp	
optics	42°
K WW/W	3000/4000 K
CRI	90+

STRIP MINI SLIM POINTER 30



reference	14192HW/WW/W
led wattage	2x7 W
lamp	COB
optics	44°
K WW/W	2700/3000/4000 K
CRI	97+

STRIP MINI SLIM GEAR

reference	14F1035	14F1035DD/pushdim/dali
wattage	35 W	35 W

	reference	14F1060	14F1060DD/pushdim/dali
	wattage	60 W	60 W

	reference	14F10100
	wattage	100 W

IP20	wattage	100 W
------	---------	-------

STRIP MINI SLIM POINTER 30 GEAR

reference	14F10-42
 wattage	10-42 W / 1-3 modules


	reference	14F10-42DD/ pushdim/dali
	wattage	10-42 W / 1-3 modules

IP20	wattage	10-42 W / 1-3 modules
------	---------	-----------------------




OUTDOOR

FIL




FILlex bollard is suitable for the illumination of outdoor areas like driveways, entrances, terraces and gardens.

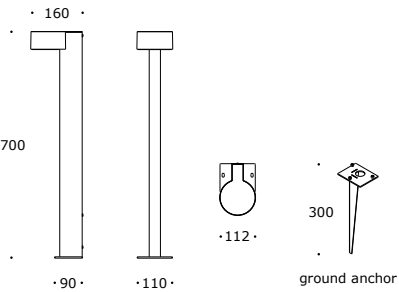


	reference	30110WW/W
230V	led wattage	6W
IP65	lamp	COB 3000, 4000 K / CRI 85
GROUND ANCHOR		
	reference	30111



FAR



A cylindrical bollard for the illumination of outdoor areas like pathways and gardens. Can be fixed with bolts directly to concrete or with an additional ground anchor.




	reference	30021WW/W
230V	led wattage	6W
IP65	lamp	

	GROUND ANCHOR	
reference		30022




FAR 150




A cylindrical bollard for the illumination of outdoor areas like pathways and gardens. It has rotationally symmetrical light distribution.

Can be fixed with bolts directly to concrete or with an additional ground or concrete anchor.

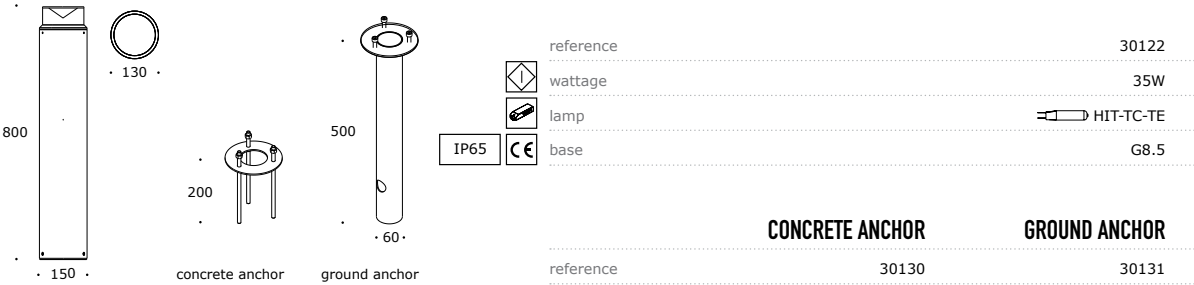


POLE



POLE family spotlights are suitable for the illumination of outdoor areas like driveways, entrances, terraces and gardens. POLE has an adjustable head and is available in several versions. The LED module has two beam options and an efficient DC/DC converter with protection against polarity reversal. Suitable for parallel wiring.



POLE SPIKE




	190 mm	290 mm
reference	30018WW/W 30118WW/W	30019WW/W 30119WW/W
wattage	3.6W	3.6W
power supply	24V-DC	24V-DC
lamp		
IP65 optics	spot 13° flood 60°	spot 13° flood 60°







POLE WALL



reference	30010WW/W 30011WW/W
wattage	3.6 W
 power supply	24V-DC
 lamp	
IP65 base	spot 13° flood 60°


BUTALO



BUTALO is a family of cylinder shaped luminaires for wall and ceiling mounting. Wall version - down and up/down. Flush tempered glass against accumulation of dirt. 230V/GU10 sockets suitable for LED retrofits.



BUTALO CEILING




	reference	30100
	wattage	max 35W
IP65	lamp	QPAR51
230V	base	GU10






BUTALO WALL



	reference	31101
	wattage	max 35 W
IP65	lamp	QPAR51
230V	base	GU10

BUTALO UD



	reference	31102
	wattage	max 2x35 W
IP65	lamp	QPAR51
230V	base	GU10




MARK A



MARK A is an outdoor round wall recessed luminaire, designed for the illumination of pathways and stairs. Integrated DC/DC converter with protection against polarity reversal. Two versions available, with springs for installation in hollow claddings and for solid surfaces where a box is needed.




MARK



reference	3150WW/W
cut-out mm	Ø 48
wattage	1.5W
power supply	12-24V-DC
IP65 lamp	

MARK FOR CONCRETE PACK



reference	3151WW/W
wattage	1.5W
power supply	12-24V-DC
IP65 lamp	


MARK CONCRETE PACK

For fair faced concrete


reference	3155
-----------	------



WALLY



WALLY is a wall recessed LED luminaire with asymmetrical light distribution suitable for the illumination of paths and stairs.




360		reference	31500
230V		led wattage	3W
IP65		lamp	COB 3000, 4000 K / CRI 85

WALLY BOX	
reference	31550



Private house


NIZ WALL



NIZ wall is a wall recessed LED luminaire with asymmetrical light distribution and optimised LED screening for high visual comfort. Suitable for the illumination of paths and stairs.




NIZ WALL 260 mm



reference	30401W/WW
led wattage	4.5 W
power supply	350 mA DC
lamp	LED STRIP 3000K / CRI 80+
230V IP65 BOX CE	
reference	30451

NIZ WALL 500 mm

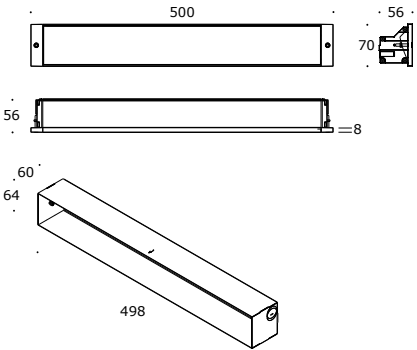


	500 mm
reference	30403W/WW
led wattage	9 W
power supply	350 mA DC
lamp	LED STRIP 3000K / CRI 80+
230V IP65 BOX CE	
reference	30453

POWER FEED

CODES


FEED RECESSED

Strip | Stripmini | Stripminislilm | Lelo | Shu



	3X	5X
reference	00014	00015


FEED RECESSED TRIMLESS



	5X
reference	00115


FEED EXTERNAL

Strip | Stripmini | Stripminislilm | Lelo | Shu




reference	00012
-----------	-------

COLOURS

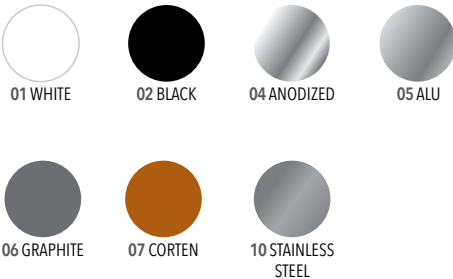


Strip | Stripmini | Stripminislilm | Lelo | Shu




	3X	5X
reference	00016	00017

FEED COMBI

Strip | Stripmini | Stripminislilm | Lelo | Shu




	5X
reference	00116




reference	00010
-----------	-------

COMBI COLOURS

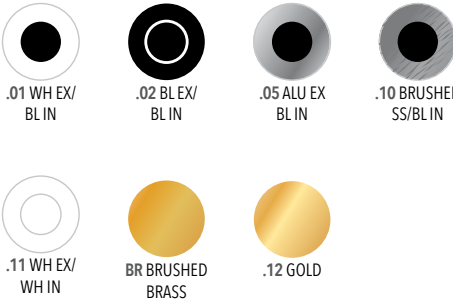


Lelo Feed

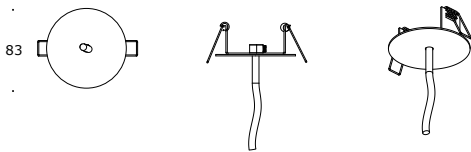


reference	00051
-----------	-------

Lelo Feed



reference	00050
-----------	-------



reference	00110
-----------	-------

LIGHT SOURCE

HW - 2700K
WW - 3000K
W - 4000K


CUSTOM




Spaghetti kitchen



Bang&Olufsen

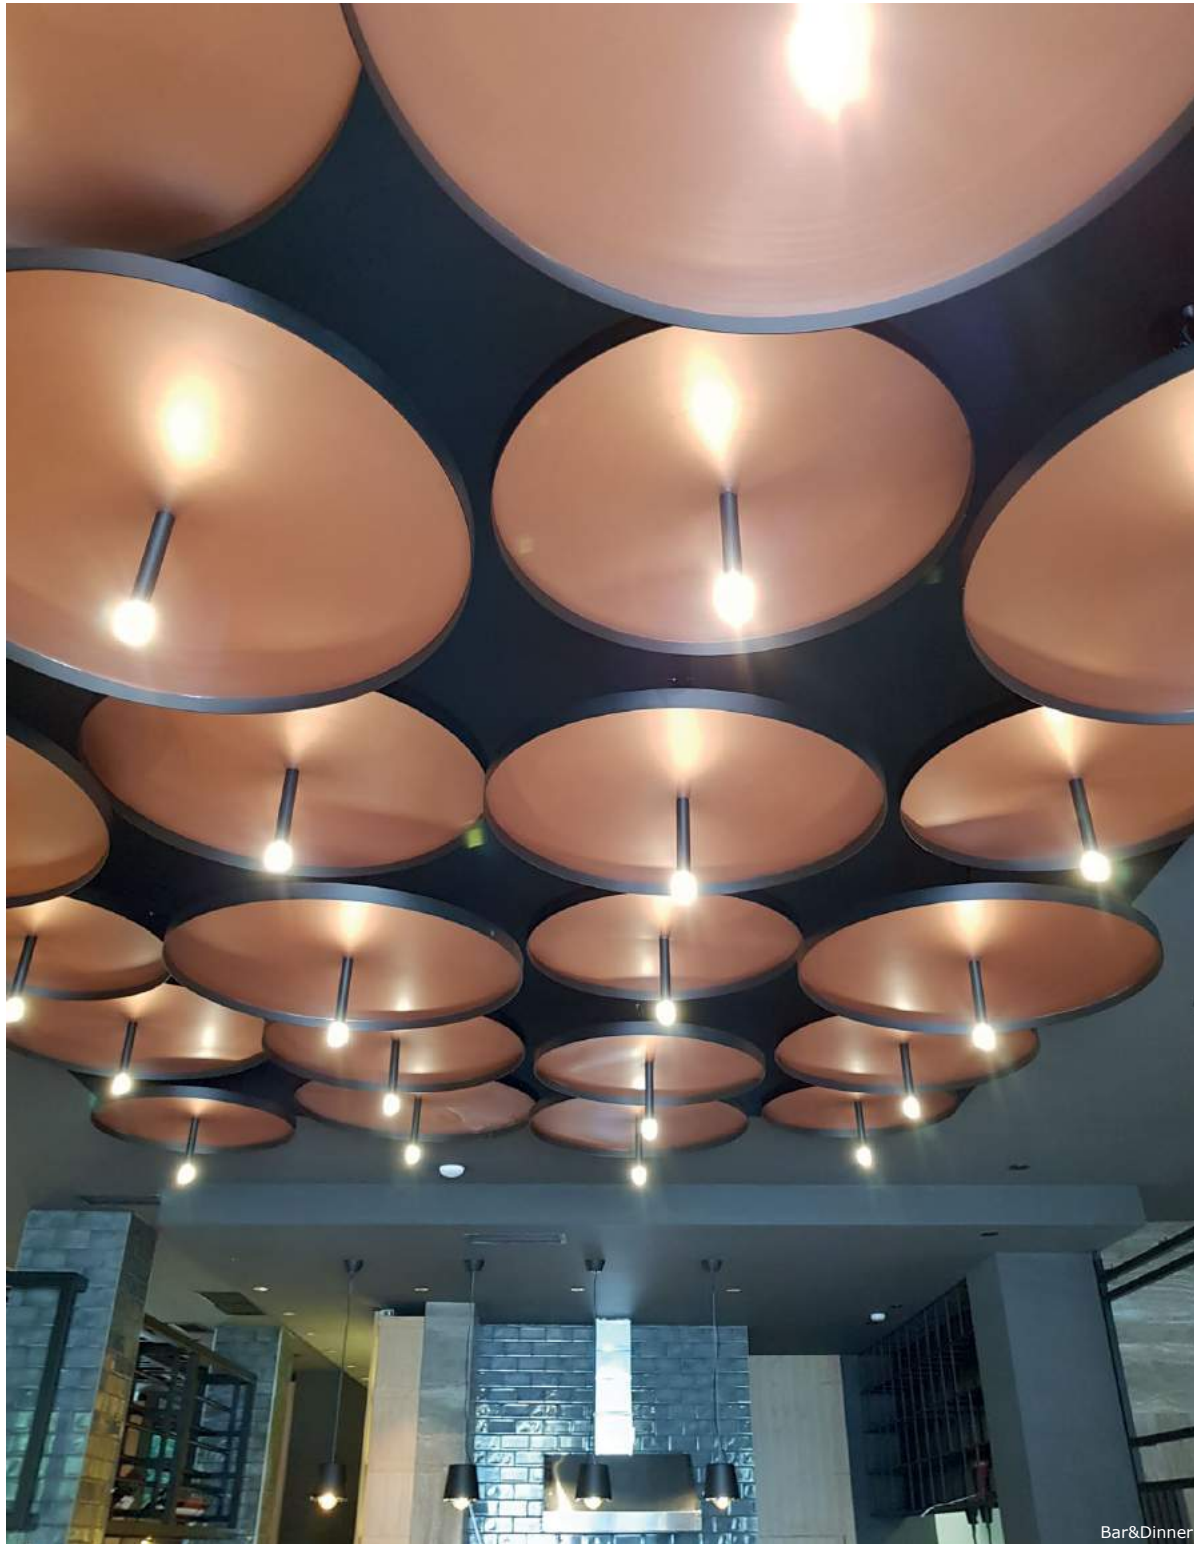

Bar&Dinner

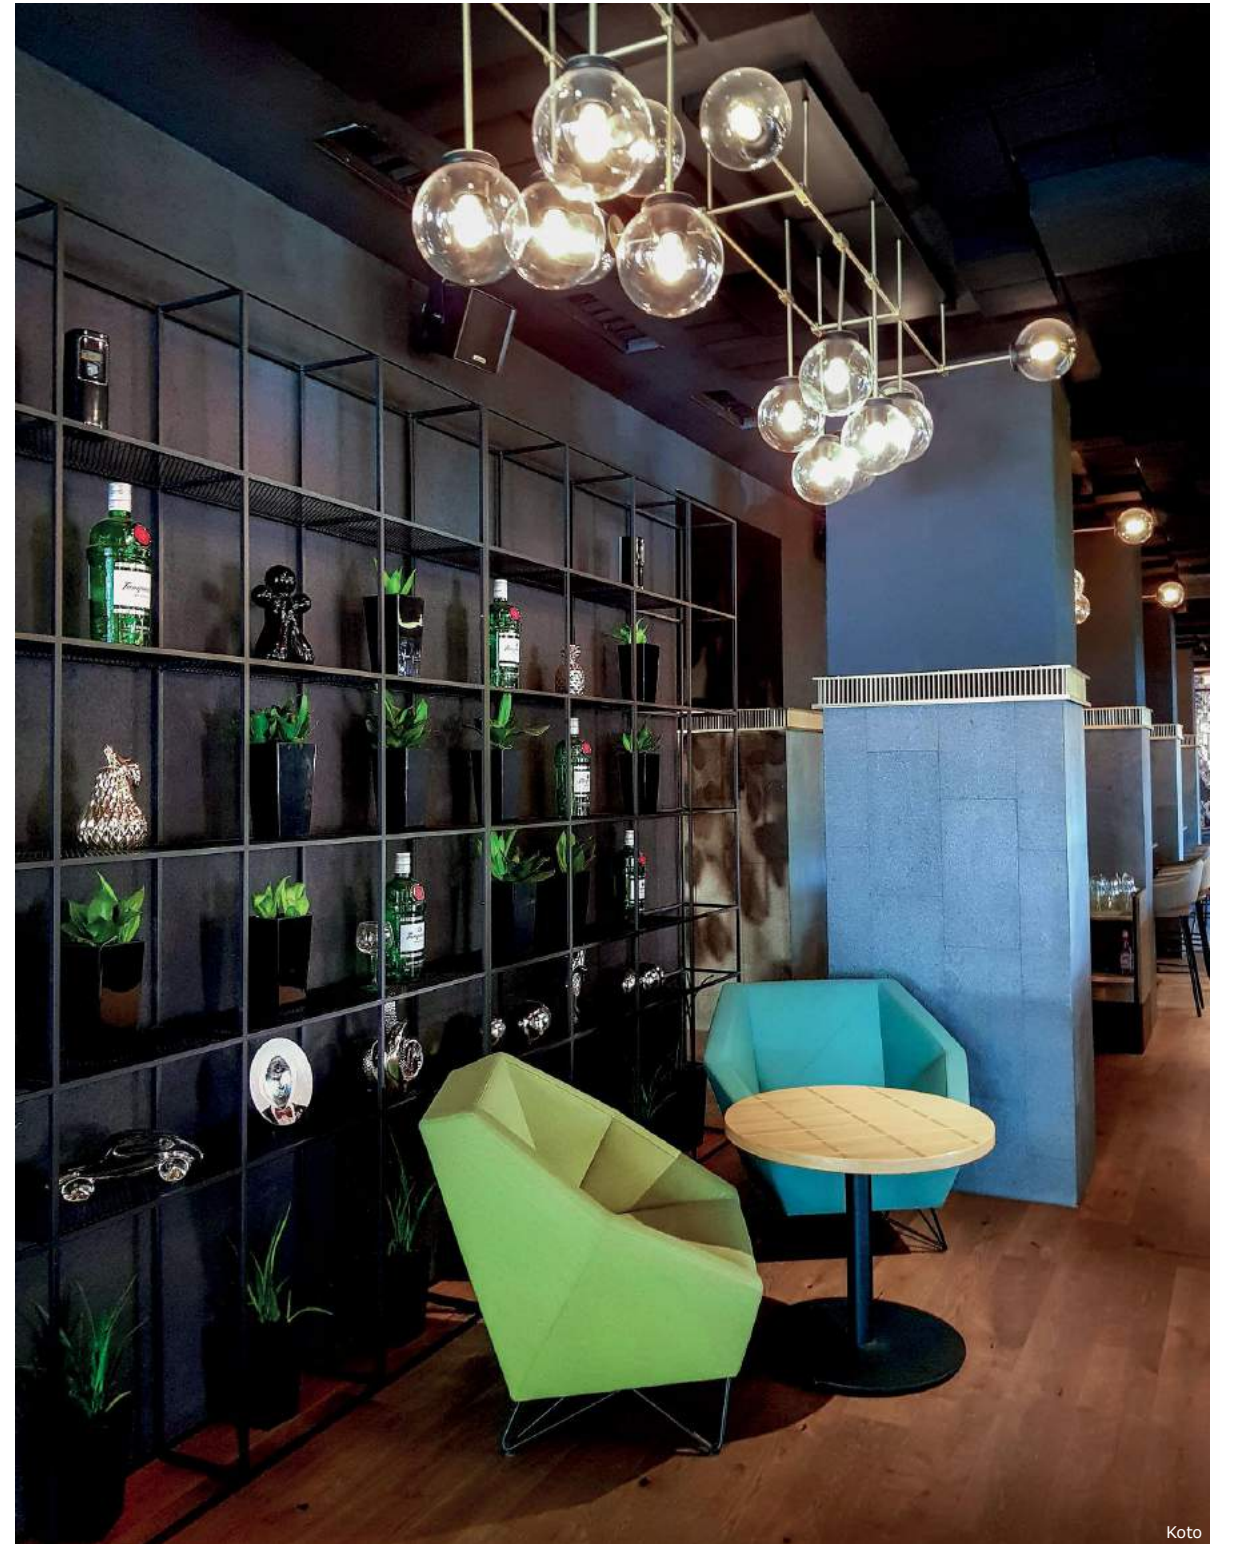

Koto



Private house



Constantinoff

MADE IN EU

Headquarters ELTIM Holding GmbH

info@eltim-solutions.com

www.eltim-solutions.com

Official distributor ELTIM Trading GmbH

Agisdorferstrasse 117

A-9433 St. Andrä, LG Klagenfurt

T +43(0)4358 2441

E office@eltim.at

